



速冻隧道链 Deepfreeze Tunnel Chain

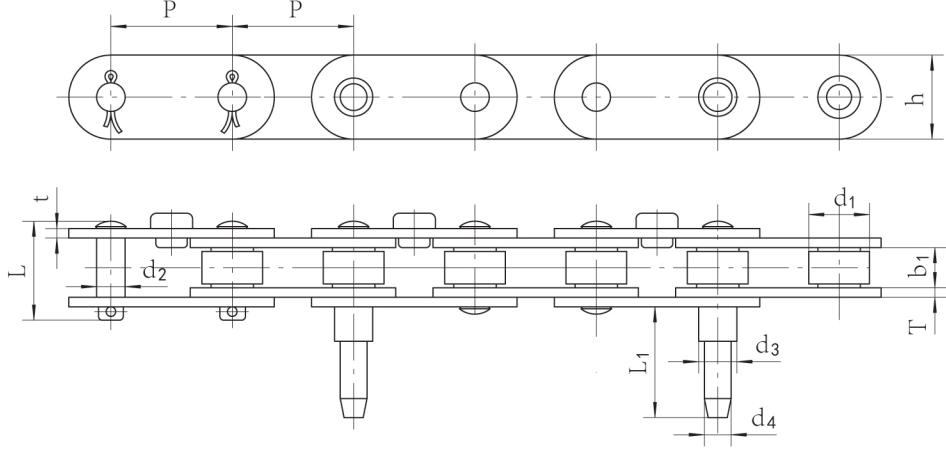


链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin					链 板 Plate		最小抗拉 强度 Minimum tensile strength
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ mm	d ₄ mm	L mm	L ₁ mm	h mm	t/T mm	Fu(min) kN
C210E-D	31.75	15.88	10.5	7.4	10	7	28	29	22	2.5	34.68

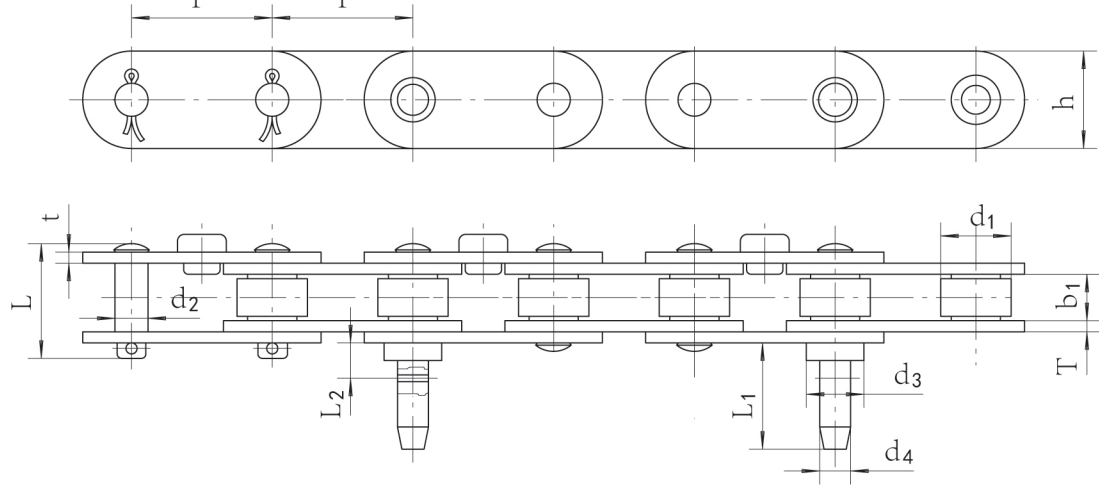


链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin						链 板 Plate		最小抗 拉强度 Minimum tensile strength
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ mm	d ₄ mm	L mm	L ₁ mm	L ₂ mm	h mm	t/T mm	Fu(min) kN
C210E-DD	31.75	15.88	10.5	7.47	13	7	28	22	8	22	2.5	34.68

速冻隧道链 Deepfreeze Tunnel Chain

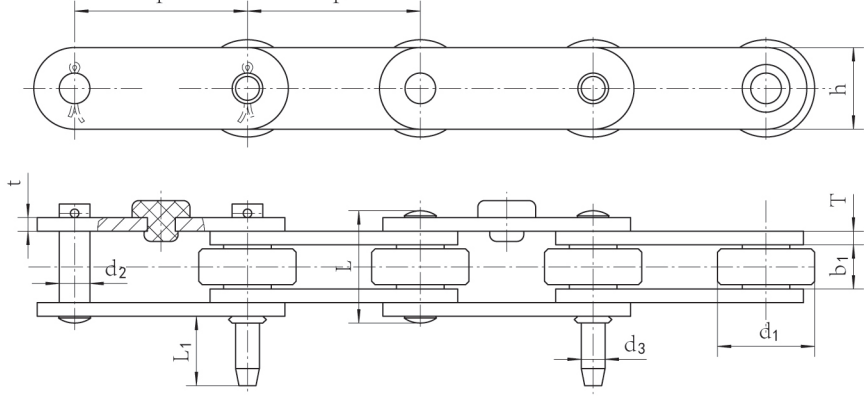


链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin				链 板 Plate		最小抗拉 强度 Minimum tensile strength
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ mm	L mm	L ₁ mm	h mm	t/T mm	Fu(min) kN
P50.8B-D	50.8	28.58	14	9	6	31.5	21.6	24	3	38.8
P50.8C-D	50.8	28.58	14	7.92	6	31.5	22	24	3	49.2

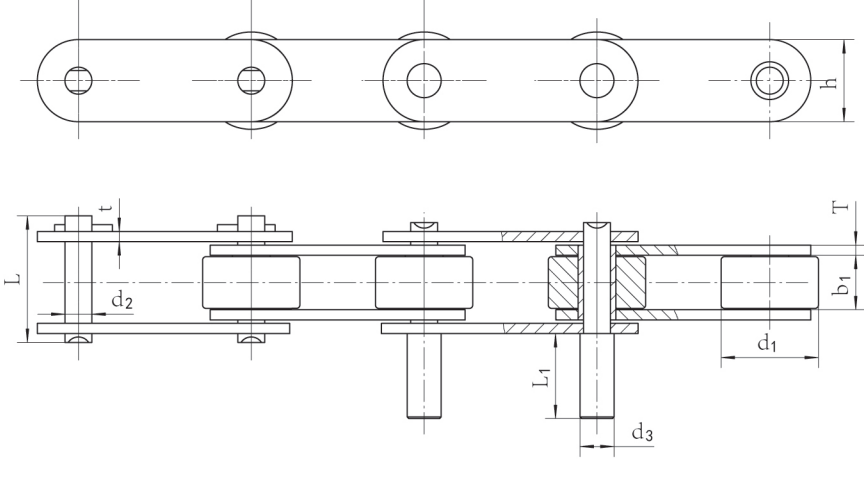


链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin				链 板 Plate		最小抗拉 强度 Minimum tensile strength
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ mm	L mm	L ₁ mm	h mm	t/T mm	Fu(min) kN
P50.8-D	50.8	28.58	15.75	7.92	10	36.2	25	24	3.2	52.5

速冻隧道链 Deepfreeze Tunnel Chain

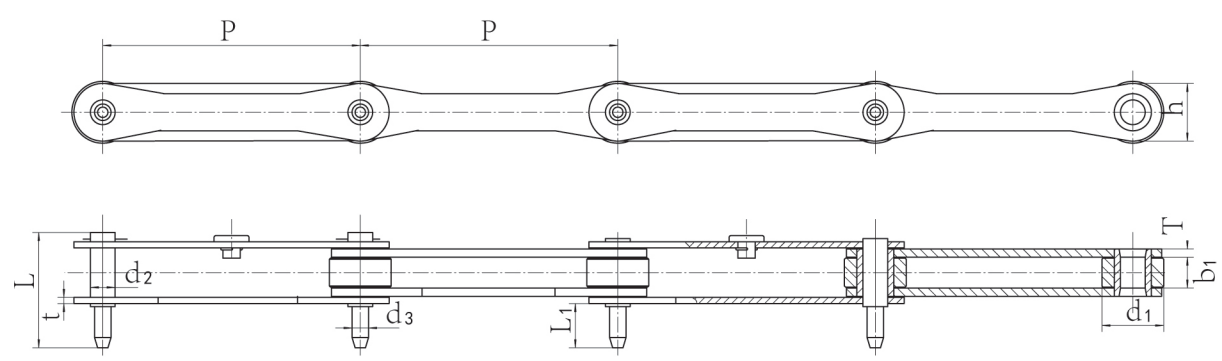


链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin				链 板 Plate		最小抗拉 强度 Minimum tensile strength
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ mm	L ₁ mm	L mm	h mm	t/T mm	Fu(min) kN
P125C-D	125	30	15	12	8	21.5	56.8	28	3/4	43

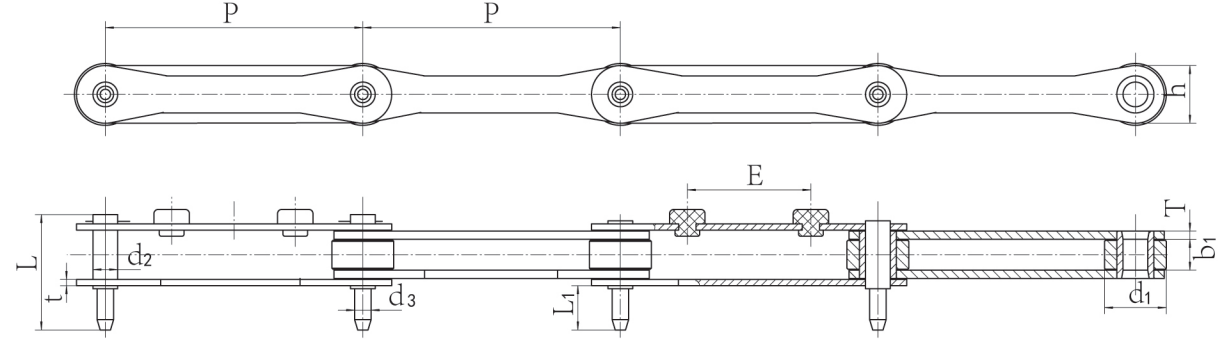


链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin				链 板 Plate		最小抗拉 强度 Minimum tensile strength
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	d ₃ mm	L ₁ mm	L mm	h mm	t/T mm	Fu(min) kN
P125D-D	125	30	15	12	7.9	21.5	57	28	3/4	50.96

速冻隧道链 Deepfreeze Tunnel Chain

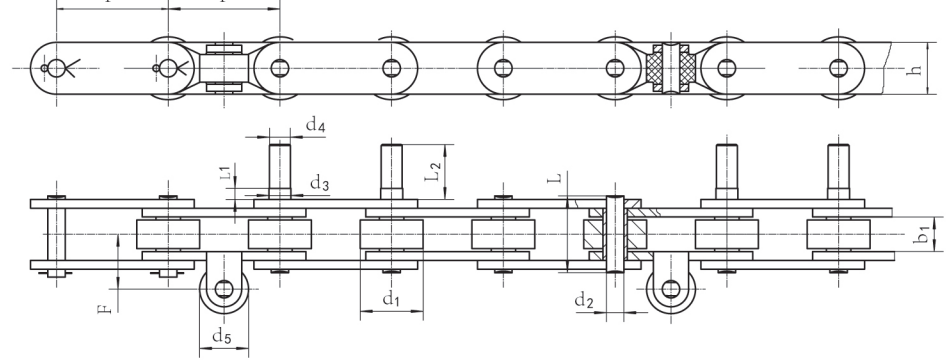

链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin		链 板 Plate		最小抗拉 强度 Minimum tensile strength
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	L mm	h mm	t/T mm	Fu(min) kN
P50.8-AA1-D-PCR	50.8	28.58	15.75	7.92	33.7	24	3.2	52.5

链号 Chain No.	F mm	L ₁ mm	L ₂ mm	d ₃ mm	d ₄ mm	d ₅ mm
P50.8-AA1-D-PCR	25	5	25	10	9.5	22.23

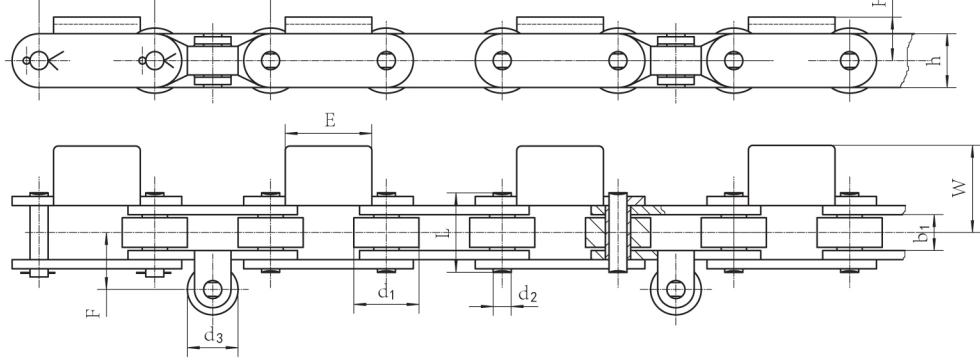

链号 Chain No.	节距 Pitch	滚子外径 Roller diameter	内节内宽 Width between inner plates	销 轴 Pin		链 板 Plate		最小抗拉 强度 Minimum tensile strength
	P mm	d ₁ (max) mm	b ₁ (min) mm	d ₂ mm	L mm	h mm	t/T mm	Fu(min) kN
P50.8-AA1-K	50.8	28.58	15.75	7.92	33.7	24	3.2	52.5

链号 Chain No.	F mm	W mm	E mm	d ₃ mm	H mm
P50.8-AA1-K	25	38	40/38	22.23	19.1